



# AMERICAN FLOOR PRODUCTS COMPANY, INC.


AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422

email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

## OMNI<sup>®</sup> Interlock Tile (FE-1025)

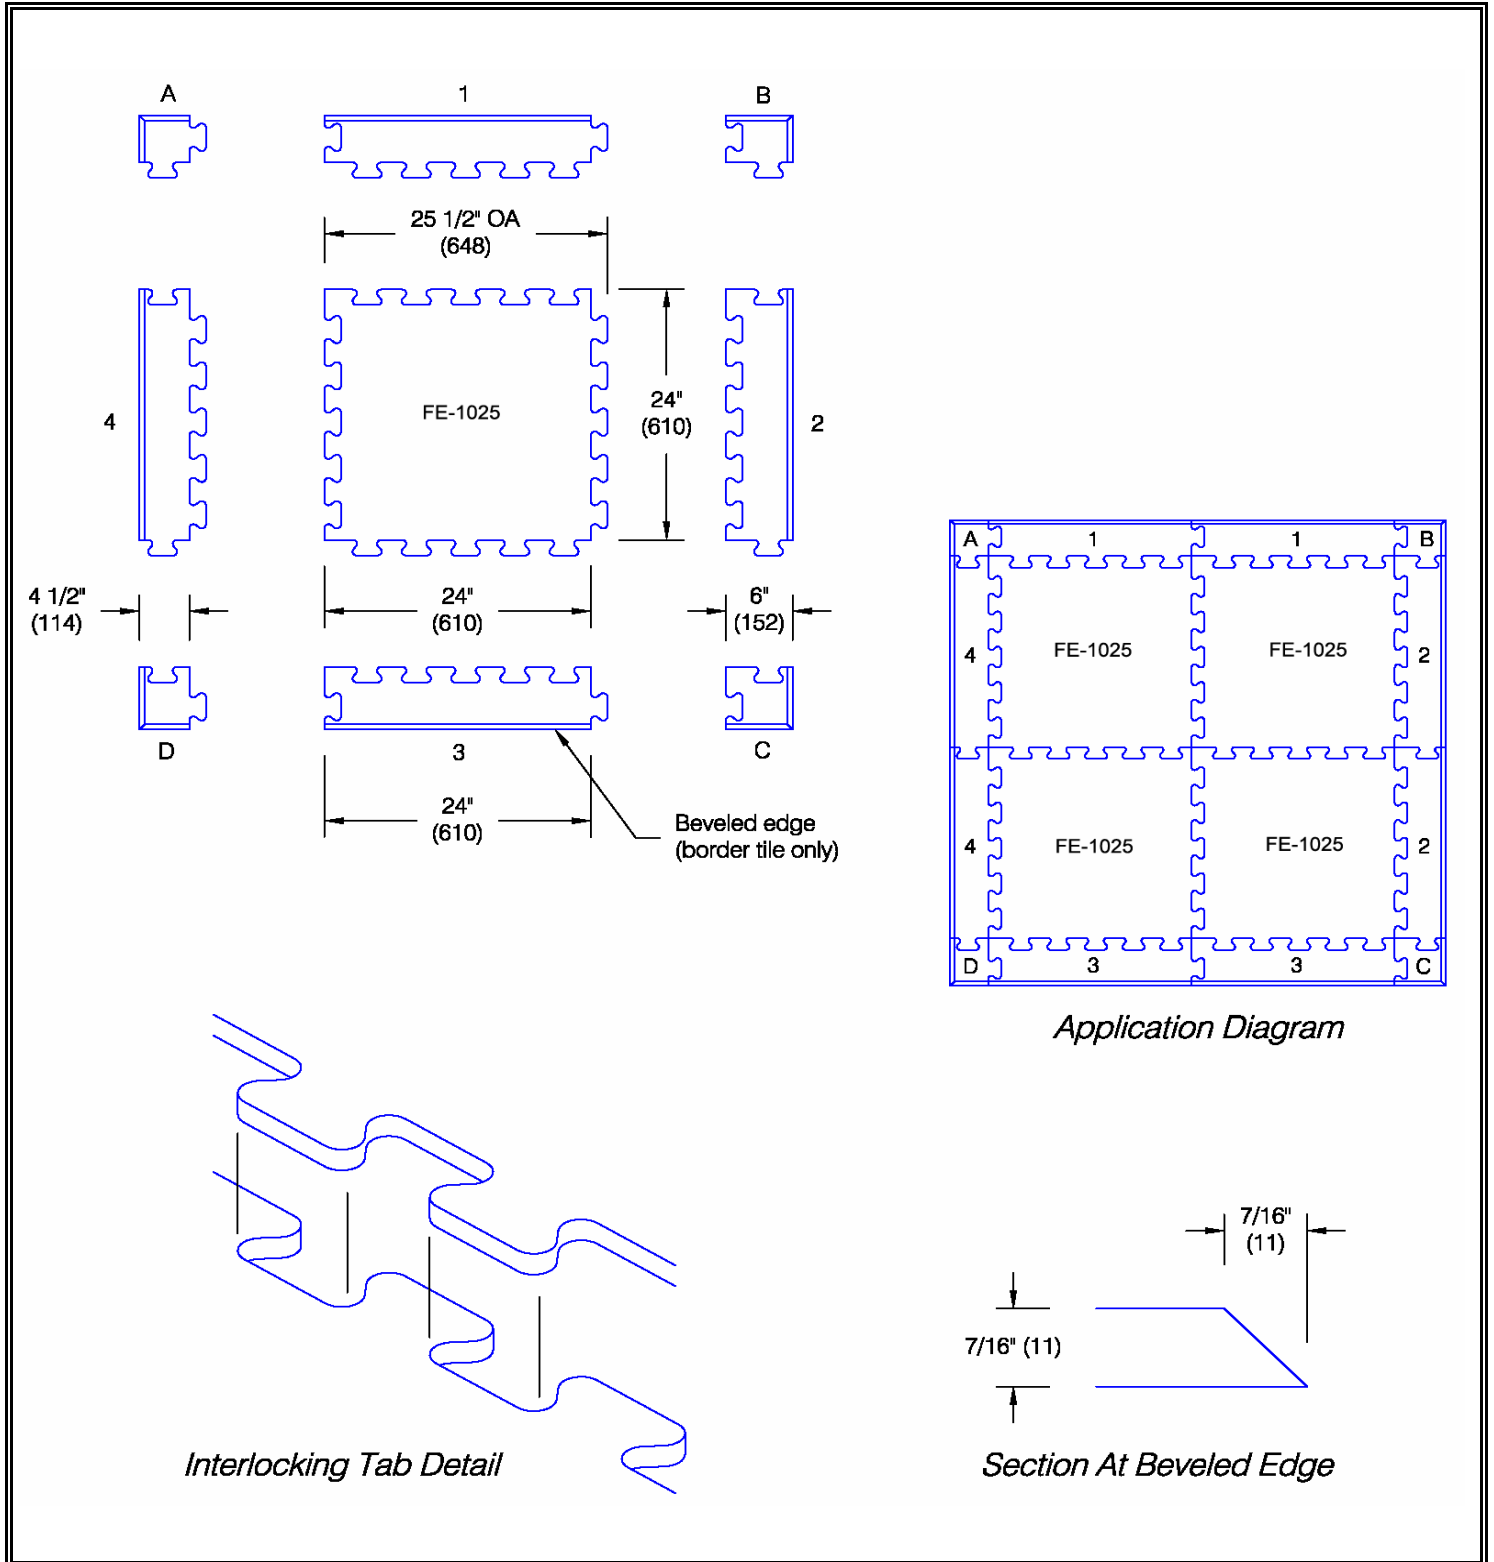

# OMNI® Interlock Tile (FE-1025)

Application	Surface	Free weight area	Material	Coefficient of friction	Flammability
Fitness area Ice rink Ski lodge Multi-purpose	Hammered	Standard	SBR Rubber	ASTM D 2047 Dry: 0.84 Wet: 0.90	NFPA 253 ASTM E 648

Testing in accordance with NFPA 253 (ASTM E 648):

Class II                      Critical Radiant Flux 0.44 watts/cm<sup>2</sup>

<p><b>Features:</b></p> <ul style="list-style-type: none"> <li>• Reversible (Center tile only)</li> <li>• No adhesives required</li> <li>• 7/16" (11 mm) thick</li> <li>• Solid color throughout</li> <li>• Manufactured from premium virgin SBR rubber compound</li> <li>• Weight:             16 pounds (7.2 kg), each tile</li> <li>• Tile-to-tile interlocks</li> </ul>	<p><b>Finishes:</b></p> <ul style="list-style-type: none"> <li>• Manufacturer's standard colors</li> <li>• Hammered finish</li> </ul>
---	---

<b>JOB NAME:</b>	<b>ITEMS</b>		<b>QUANTITY</b>
<b>JOB NUMBER:</b>	<b>Center Tile:</b>		
<b>CONTRACTOR:</b>	<b>Border Tile:</b>	1	
		2	
		3	
		4	
<b>ARCHITECT:</b>	<b>Corner Tile:</b>	A	
		B	
		C	
		D	
<b>DEALER NAME:</b>	<b>Color:</b>		
<b>SIGNATURE:</b> _____ <b>Date:</b> _____			