





# AMERICAN FLOOR PRODUCTS COMPANY, INC.

**AFCO-USA**

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422  
email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

## E.X.D.-CHOCK® (WC-2378)

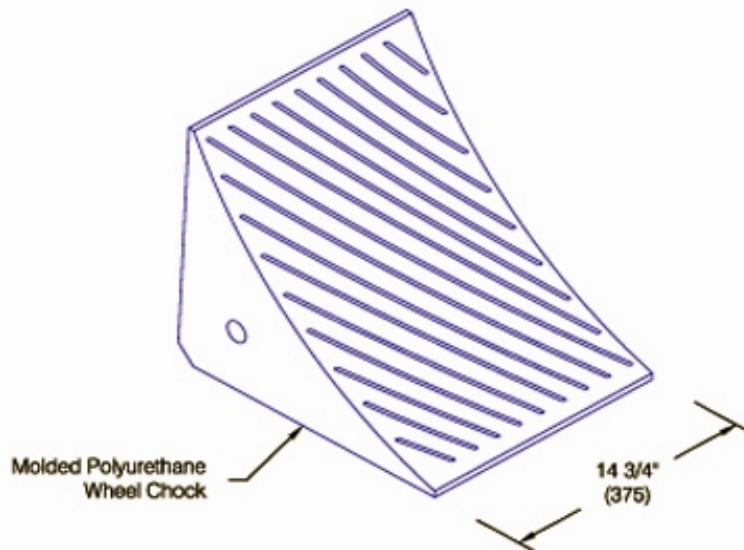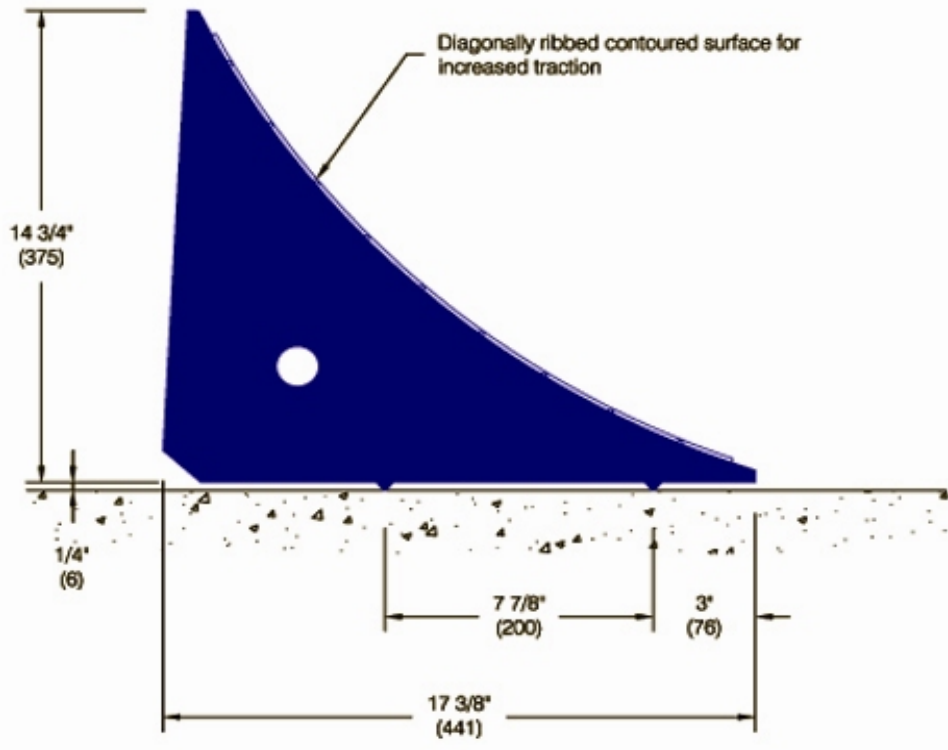

## E.X.D.-CHOCK® (WC-2378)

Profile	Application	Shock absorbing	ADA Compliance	Material	Flammability & smoke developed (ASTM E-84)
Sculpted	High abuse	25.4 ft.lbs/in. ASTM D-256	N/A	Polyurethane	N/A

<p><b>Features:</b></p> <ul style="list-style-type: none"> <li>• High visibility and long wear</li> <li>• Unaffected by oils and chemicals</li> <li>• Water and abrasion resistant</li> <li>• Up to 50% deflection @ 68 psi</li> <li>• Opening for ropes, chains</li> <li>• Rated for 120 ton. trucks</li> <li>• Weight: 28 lbs.</li> </ul>	<p><b>Applications:</b></p> <ul style="list-style-type: none"> <li>• Suitable for large road equipment</li> </ul> <p><b>Standard Color:</b> (117) Safety Orange</p>
---	---

Bumper designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:	ITEMS	QUANTITY
JOB NUMBER:	Wheel Chock Length:	
CONTRACTOR:		
ARCHITECT:		
DEALER NAME:		
SIGNATURE:	Date:	