




AMERICAN FLOOR PRODUCTS COMPANY, INC.

AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422
email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

STAR[®] Corner Guard (CG-2150)

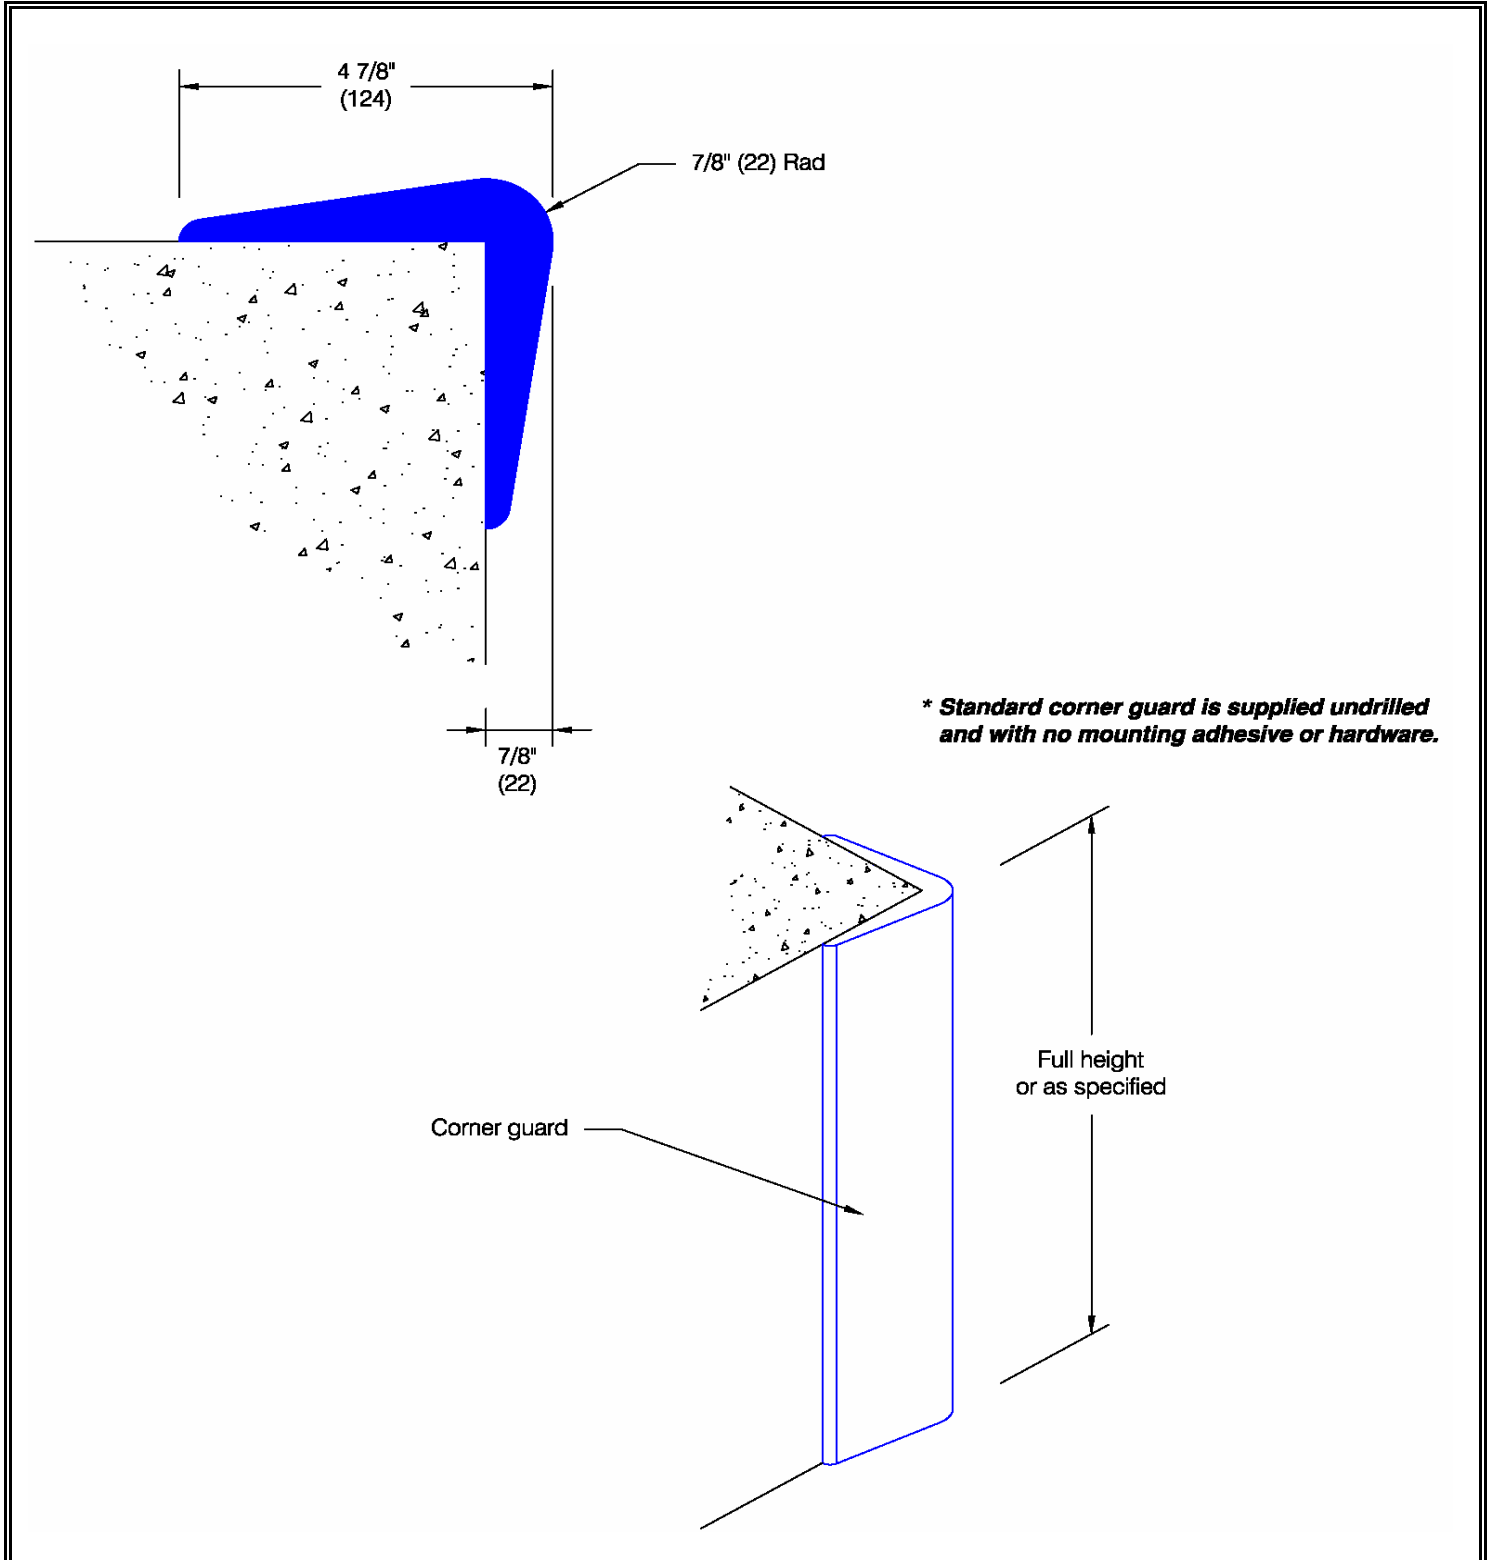

STAR[®] Corner Guard (CG-2150)

Profile	Application	Shock absorbing	ADA Compliance	Materials	Flammability & smoke developed (ASTM E84)
Surface	High abuse	25.4 ft.lbs/in. ASTM D-256	Yes	EPDM Rubber	N/A

<p>Features:</p> <ul style="list-style-type: none"> • Extruded EPDM rubber to RMA tolerances • Weight: 2.6 lbs./lin. ft. • Stock length: <ul style="list-style-type: none"> 4'-0" (1219 mm) 6'-0" (1829 mm) 8'-0" (2438 mm) 10'-0" (3048 mm) 12'-0" (3658 mm) 	<p>Mounting Options:</p> <ul style="list-style-type: none"> • Suggested mounting <ul style="list-style-type: none"> Adhesive: Construction mastic ADH-4323 Mechanical hardware: 3 per 48" (1219 mm) side Concrete 3/8" (10 mm) x 2-1/2" (64 mm) bolt and expansion shield Wood: lag-screws <p>Standard Color: (5)Gray</p>
---	---

Corner Guard designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:	ITEMS	QUANTITY
JOB NUMBER:	Guard Length: 4', 6', 8', 10', 12'	
CONTRACTOR:	Adhesive:	
ARCHITECT:		
DEALER NAME:		
SIGNATURE:	Date:	