




# AMERICAN FLOOR PRODUCTS COMPANY, INC.

**AFCO-USA**


P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422  
 email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

## STORM INLAY® Logo Mat (CM-1679) WATER-HOG CLASSIC LOGO MAT

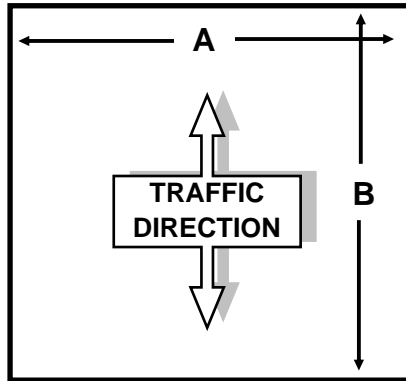

<b>A x B</b>
Type of Frame:
Style of Frame:
Color of Mat:

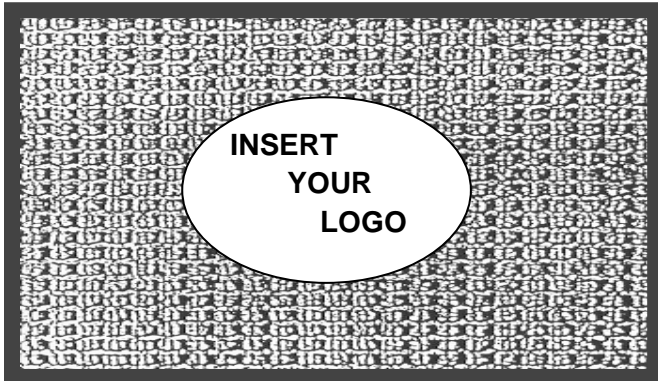

### SPECIFICATIONS

**FACE:** Molded reinforced  
 Needle punch

**YARN:** 100% solution dyed low  
 static polypropylene

**PILE HEIGHT:** 1/4 inch

**FACE WEIGHT:** 24 ounces per square yard

**SURFACE DESIGN:** Squares

**RUBBER BORDER:** Black

**Colors:** Aquamarine, Bluestone, Bordeaux, Charcoal, Dk. Brown, Evergreen, Gold, Lt. Green, Md. Blue, Md. Brown, Md. Gray, Navy, Orange, Purple, Red/Black, Solid Red, White, Yellow.  
Underline colors can be used as a base color in 3' & 4' widths only.

Not recommended for use in areas exposed to grease or petroleum products.

**FLAMMABILITY:** Passes pill test DOC-FF-1-70

Flux per ASTM E-648 greater than 0.45 watts/cm<sup>2</sup>

**STATIC:** Electrical resistance, IBM method. Average megohms 40.6

Electrical resistance, Burroughs method. Average megohms 73.6

AATCC134: KVStep 0.1 and KVScuff 0.2

**DIMENSIONAL STABILITY AACHENER TEST:** Less than 0.2% change

JOB NAME:	ITEMS	SELECTION QUANTITY
JOB NUMBER:		
CONTRACTOR:		
ARCHITECT:		
DEALER NAME:		
APPROVAL SIGNATURE:                      Date:	DRAWN BY:	