





AMERICAN FLOOR PRODUCTS COMPANY, INC.

AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422
email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

HOP1® 3" Invisible Wall Guard (WG-2182)

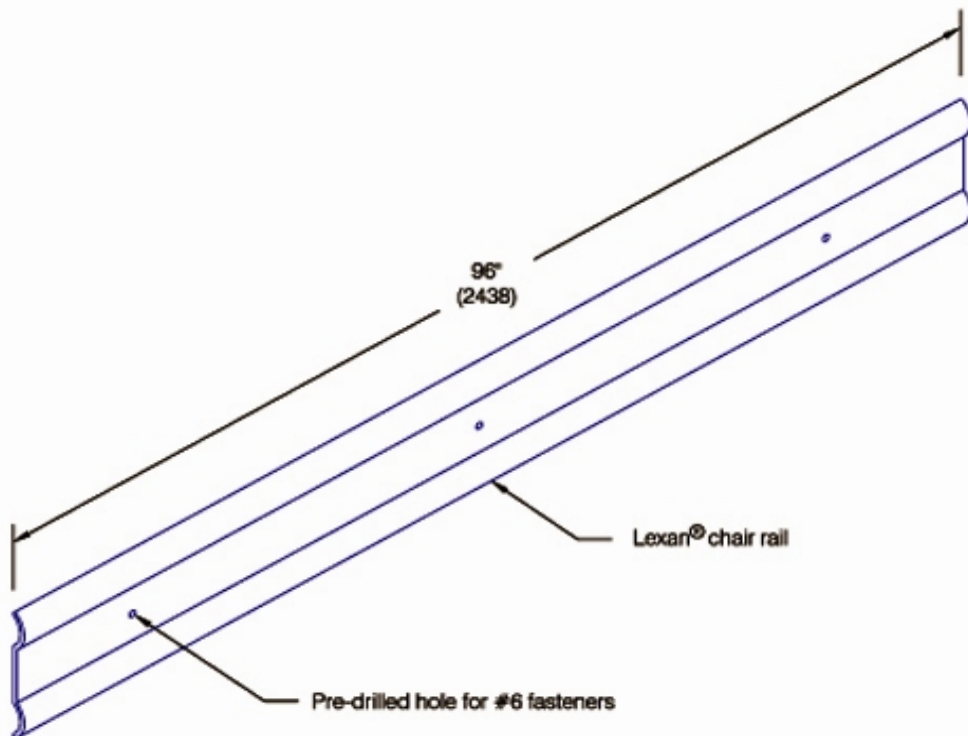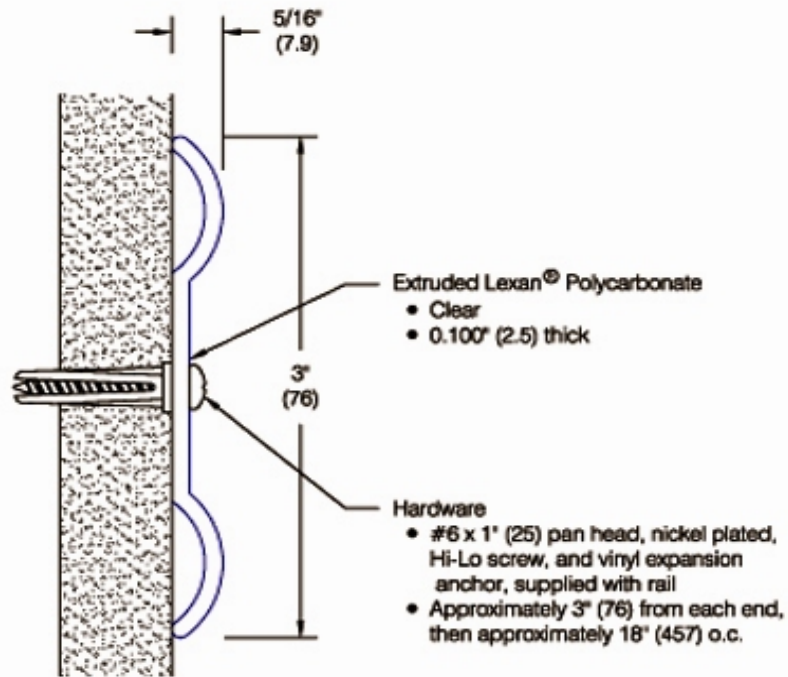

HOPi® 3" Invisible Wall Guard (WG-2182)

Profile	Application	Shock absorbing	ADA Compliance	Materials	Flammability & smoke developed (ASTM E-84)
Sculpted	High abuse Med-high abuse	25.4 ft.lbs/in. ASTM D-256	Yes	G.E. Lexan Polycarbonate	Class A

Testing in accordance with NFPA 255 (ASTM E 84):

Class A

Flame Spread Index: 5

Smoke Developed Index: 185

<p>Features:</p> <ul style="list-style-type: none"> • Class A fire rating (ASTM E-84) • Extruded Lexan® Polycarbonate • Weight 3" (76 mm): 1.5 lbs./each • Stock length: 8'-0" (2438 mm) 	<p>Finishes:</p> <ul style="list-style-type: none"> • Clear # 132 	<p>Drillings:</p> <ul style="list-style-type: none"> • Drilled approximately 3" (76 mm) from each end, then approximately 18" (457 mm) on center
---	---	--

Wall Guard designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

	ITEMS	QUANTITY
JOB NAME:		
JOB NUMBER:	Guard Length: 8 ft.	
CONTRACTOR:		
ARCHITECT:		
DEALER:		
SIGNATURE:	Date:	