





# AMERICAN FLOOR PRODUCTS COMPANY, INC.

**AFCO-USA**

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422  
email: [sales@afco-usa.com](mailto:sales@afco-usa.com) • Web Site: [www.afco-usa.com](http://www.afco-usa.com)

CUSTOMER P.O. #

## ESKIMO® 0.040" x 4" Wall Guard (WG-2187)

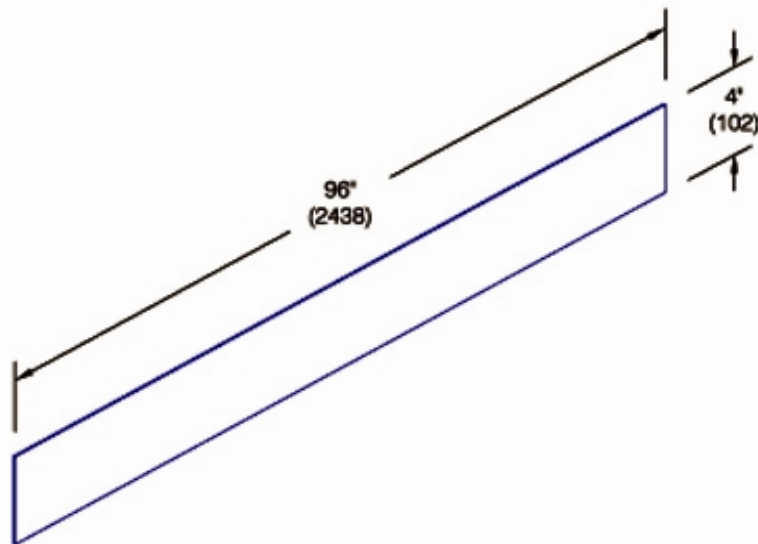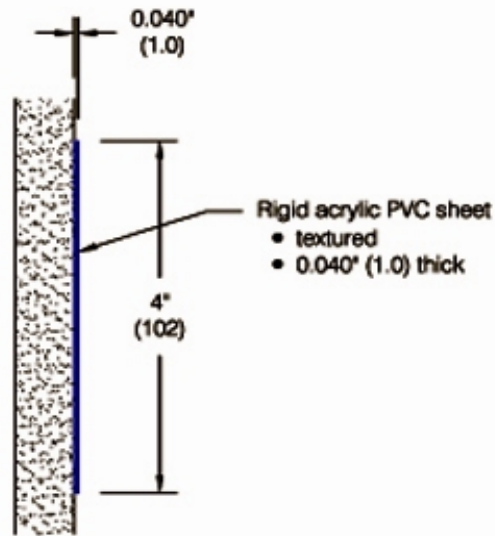

# ESKIMO® 0.040" x 4" Wall Guard (WG-2187)

Profile	Application	Shock absorbing	ADA Compliance	Materials	Flammability & smoke developed (ASTM E-84)
Flat	High abuse	25.4 ft.lbs/in. ASTM D-256	Yes	Rigid acrylic PVC sheet	Class A

Testing in accordance with NFPA 255 (ASTM E 84):

Class A

Flame Spread Index: 5

Smoke Developed Index: 185

<p><b>Features:</b></p> <ul style="list-style-type: none"> <li>• Class A fire rating</li> <li>• Heavier gauges available</li> <li>• Stock length: 8'-0" (2438 mm)</li> </ul>	<p><b>Finishes:</b></p> <ul style="list-style-type: none"> <li>• Manufacturer's standard colors</li> <li>• Custom colors available</li> </ul>	<p><b>Mounting Options:</b></p> <ul style="list-style-type: none"> <li>• Adhesive: (Undrilled) AD-1330 or AD-1346 supplied separately.</li> <li>• Drilled: Clearance holes for ABSS-80 #8 x 1-1/4" (32 mm) pan head sheet metal screw supplied separately as required</li> <li>• Taped: ADH-4042 double sided adhesive tape factory applied to rub rail</li> </ul>
--	---	--

Wall Guard designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:	ITEMS	QUANTITY
JOB NUMBER:	Guard Length: 8 ft. Width: 4 inches	
CONTRACTOR:	Color:	
ARCHITECT:	Adhesive: (Undrilled)	
DEALER NAME:	Drilled:	
SIGNATURE: _____ Date: _____	Taped:	