





AMERICAN FLOOR PRODUCTS COMPANY, INC.

AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422
email: sales@afco-usa.com • Web Site: www.afco-usa.com



CUSTOMER P.O. #

ESKIMO® 0.060" x 6" Wall Guard (WG-2187)

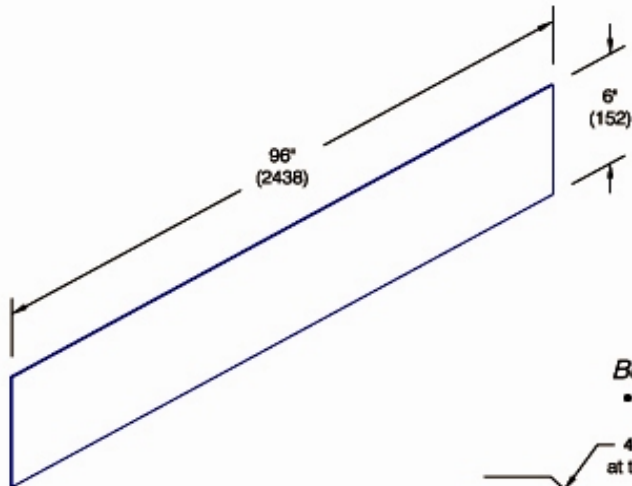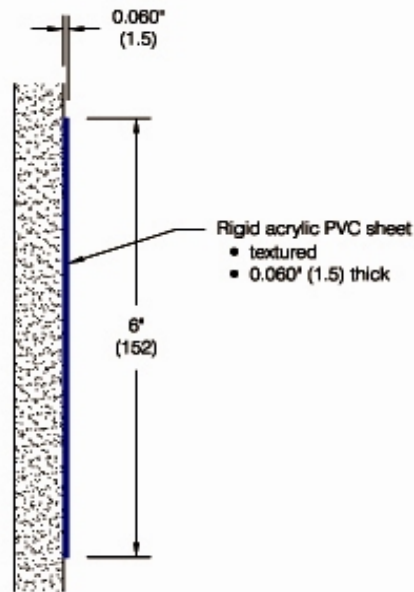

Beveled Edge Option:

- Includes chamfered top edge



Optional Beveling Detail

ESKIMO® 0.060" x 6" Wall Guard (WG-2187)

Profile	Application	Shock absorbing	ADA Compliance	Materials	Flammability & smoke developed (ASTM E-84)
Flat	High abuse	25.4 ft.lbs/in. ASTM D-256	Yes	Rigid acrylic PVC sheet	Class A

Testing in accordance with NFPA 255 (ASTM E 84):

Class A

Flame Spread Index: 5

Smoke Developed Index: 185

<p>Features:</p> <ul style="list-style-type: none"> • Class A fire rating • Heavier gauges available • Stock length: 8'-0" (2438 mm) 	<p>Finishes:</p> <ul style="list-style-type: none"> • Manufacturer's standard colors • Custom colors available • Optional beveled edges 	<p>Mounting Options:</p> <ul style="list-style-type: none"> • Adhesive: (Undrilled) AD-1330 or AD-1346 supplied separately. • Drilled: Clearance holes for ABSS-80 #8 x 1-1/4" (32 mm) pan head sheet metal screw supplied separately as required • Taped: ADH-4042 double sided adhesive tape factory applied to rub rail
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Wall Guard designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

JOB NAME:	ITEMS	QUANTITY
JOB NUMBER:	Guard Length: 8 ft. Width: 6 inches	
CONTRACTOR:	Color:	
ARCHITECT:	Adhesive: (Undrilled)	
DEALER NAME:	Drilled:	
SIGNATURE: _____ Date: _____	Taped:	