




AMERICAN FLOOR PRODUCTS COMPANY, INC.

AFCO-USA

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422
email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

UTE[®] Wall Guard (WG-2199)

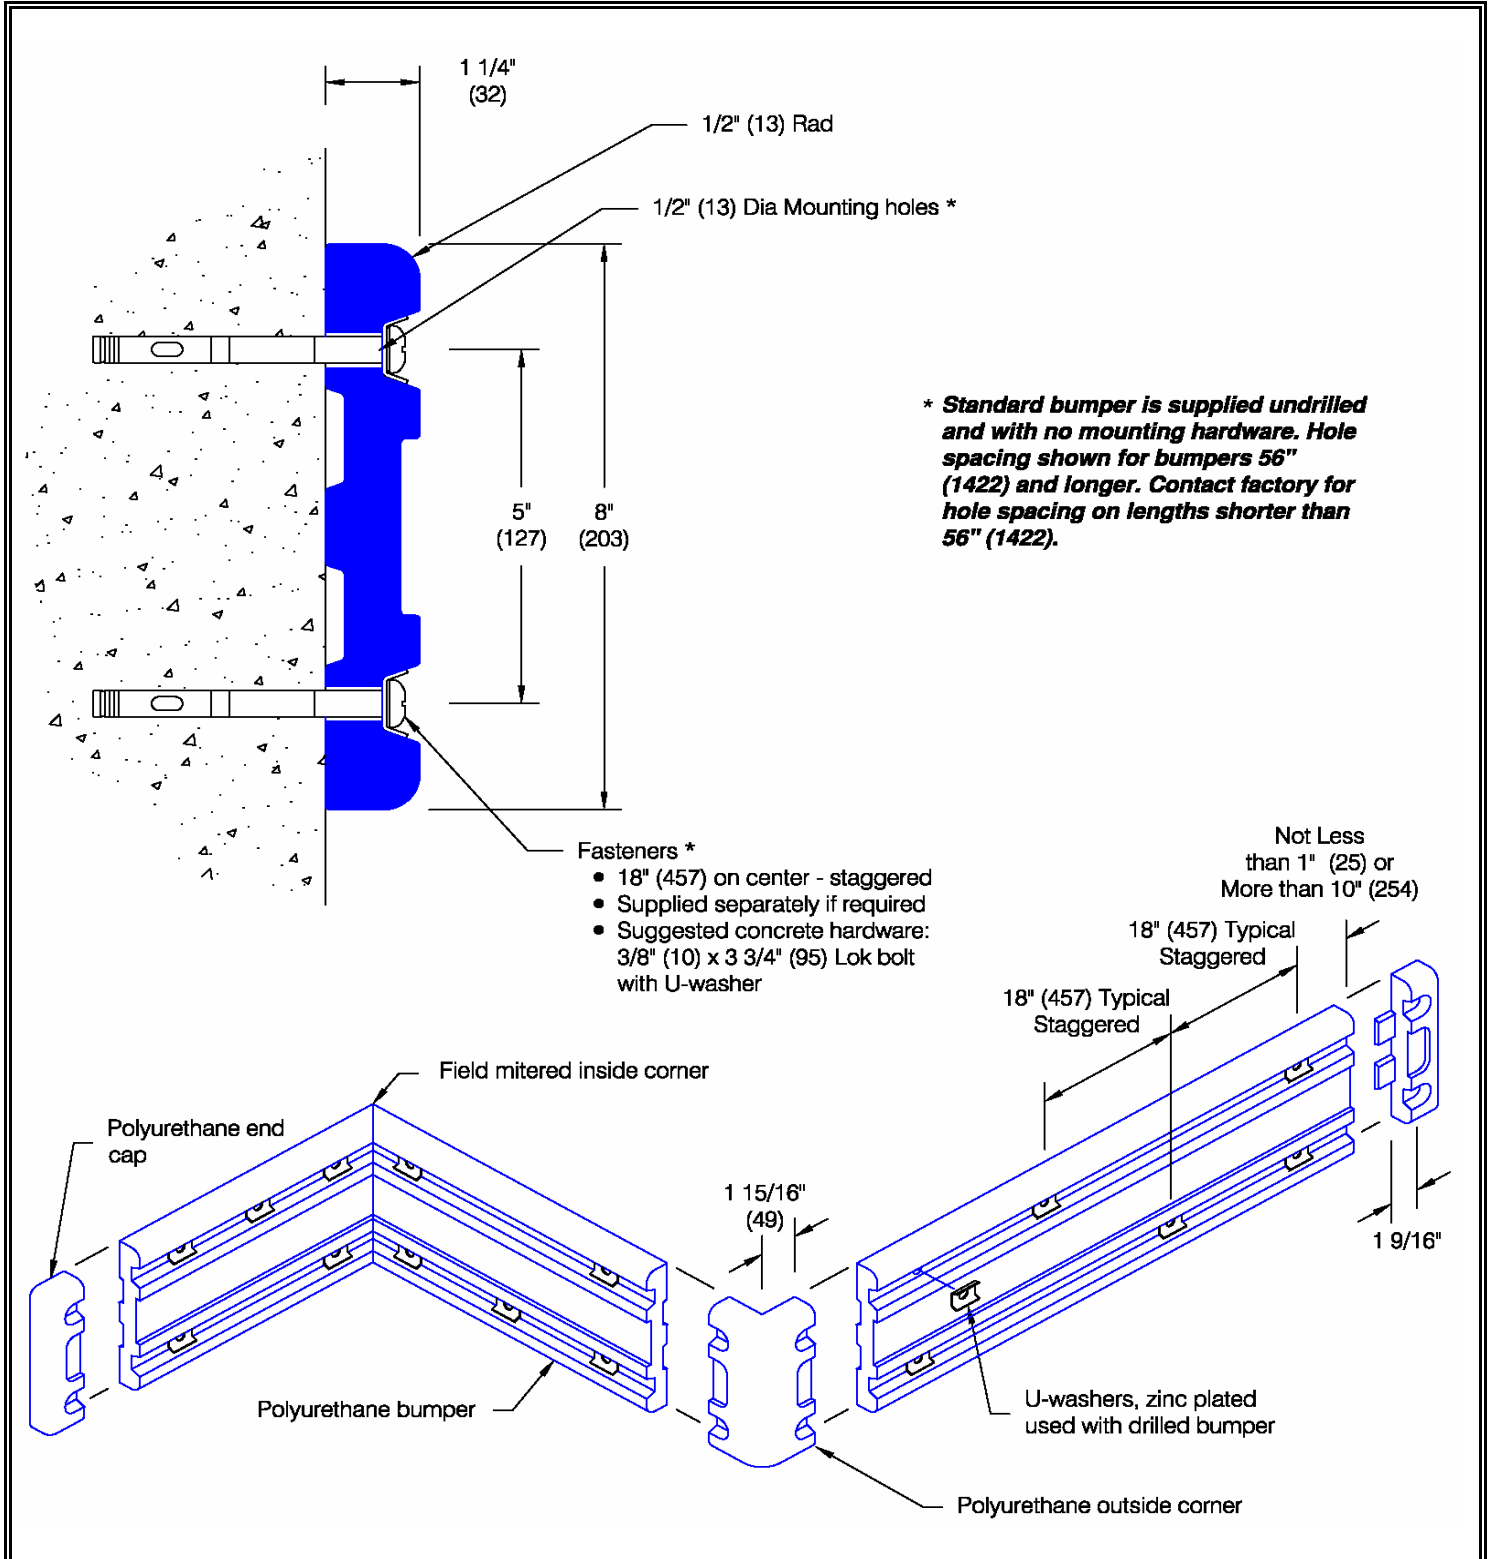

UTE® Wall Guard (WG-2199)

Profile	Application	Shock absorbing	ADA Compliance	Materials	Flammability & smoke developed (ASTM E-84)
Flat	High abuse	25.4 ft.lbs/in. ASTM D-256	N/A	Urethane	N/A

<p>Features:</p> <ul style="list-style-type: none"> • Molded polyurethane • Durometer: (ASTM D-412) 70 ± 5 shore A • Tensile strength PSI: (ASTM D-412) 592 min. • Elongation: (ASTM D-412) 61% min. • Tear strength: (ASTM D-624) 166 lbs./in. min. • Stock length: 10'-0" (3048 mm) 	<p>Finishes:</p> <ul style="list-style-type: none"> • Drilled for hardware: Approximately 1" (25 mm) - 10" (254 mm) in from each end, staggered 18" (457 mm) on center both grooves (varies as restricted by length) • Custom drilling available <p>Standard Color: (38)Charcoal</p>
--	--

Wall Guard designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

	ITEMS	QUANTITY
JOB NAME:		
JOB NUMBER:	Guard Length: 10 ft.	
CONTRACTOR:	End Cap:	
ARCHITECT:	Outside Corner:	
DEALER NAME:	U-Washer:	
SIGNATURE: Date:	Lok Bolt:	